

FUNNEL

Design by .

Reference

2013.

Application

Ceiling Lamps

Installation type

Surface

Description

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle.

Diffuser

Aluminium diffuser

Materials

Shade: Aluminum

Reflector: Aluminum

Wall plate: Steel

Finish


 **2013-10** White (NCS S 0300-N)

 **2013-36** Soft Pink (NCS S 1010-Y50R)

 **2013-47** Green L1 (NCS S 4005-G80Y)

 **2013-51** Matt gold leaf (Gold)

Sketch



Electrical characteristics

6 x LED 4,48W 350mA

Total 26.9 W



VIBIA



Light source: 2700K CRI >80

Driver included: CC - Constant Current 350 mA 110-240V 50/60Hz

Electronic dimming DALI 1-10V PUSH

ficha.fichatecnicaproducto.regulacion.opcional SMART

Technical characteristics

- Possible installation in ceiling and wall

Physical characteristics

1 Box / 0.25 x 0.42 x 0.42 m. / Vol. 0.0441 m³ /

Gross weight 3.0 kg. / Net weight 2.7 kg.


Installation and assembly

Please, see the installation manual


Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

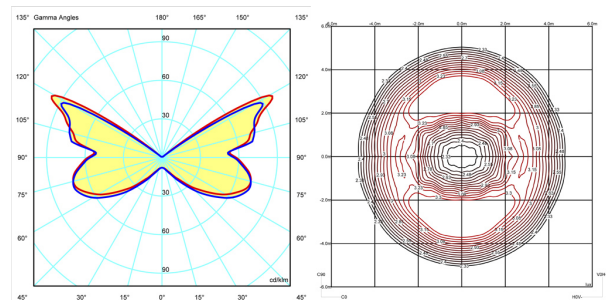

Certificates

