

FUNNEL

Design by .

VIBIA

Reference

2014.

Application

Ceiling Lamps

Installation type

Surface

Description

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle.


Materials

Shade: Aluminum
Reflector: Aluminum
Wall plate: Steel

Finish

-  **2014-10** White (NCS S 0300-N)
-  **2014-36** Soft Pink (NCS S 1010-Y50R)
-  **2014-47** Green L1 (NCS S 4005-G80Y)

Sketch




Electrical characteristics

6 x LED 4,48W 350mA

Total 26.9 W



A+

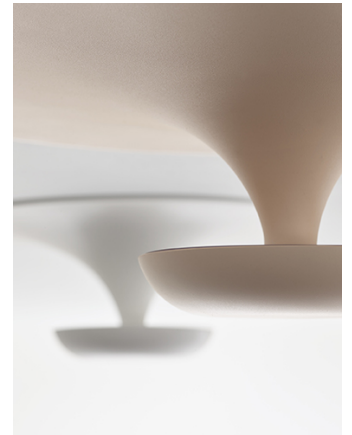

Light source: 2700K CRI >80

Driver included: CC - Constant Current 350 mA 110-240V 50/60Hz

Electronic dimming DALI 1-10V PUSH

ficha.fichatecnicaproducto.regulacion.opcional SMART

Physical characteristics

1 Box / 0.27 x 0.27 x 0.16 m. / Vol. 0.0972 m³ /
Gross weight 2.7 kg. / Net weight 2.1 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Certificates

